


# U-TURN

Michel Charlot, 2012



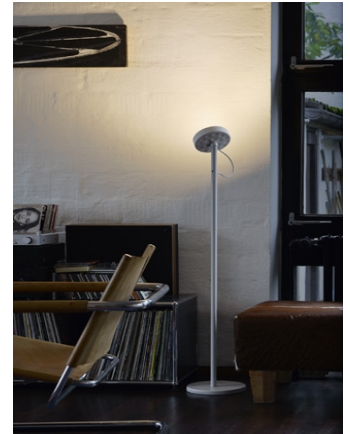


## Standing light U-TURN-12-TD-GR-GR

Type	U-TURN-12-TD-GR-GR
Order No	51003803-TD-GR-GR

Lamp type/assembly	Standing light
Finish	Telegrey
Size	H 1335 mm
Energy efficiency class	A
Light source	LED, 2x 490 lm, 2700 K
Operating mode	Dimmable
Operation	On tube, backlit
Ballast (number)	Driver (1), cable integrated
Lamp head	Die cast aluminum, wet painted, telegrey
Diffuser	PMMA, frosted on one side
Tube	Extruded aluminum profile, wet painted, telegrey
Base	Zinc die-cast, wet painted, telegrey

Power cable	Black, L 2000 mm
Mains plug	CH (type J), Schuko (type F) or UK (type G)
Light distribution	Direct
Beam angle	Adjustable 40° / 80°
Power consumption	26 W
Rated voltage	220 - 240V, 50/60Hz
Stand-by consumption	< 0.5W
Safety class	I
Protection type	IP 20
Packaging units	1 (1600 x 300 x 300 mm)
Weight	10.5 kg
Guarantee	36 months

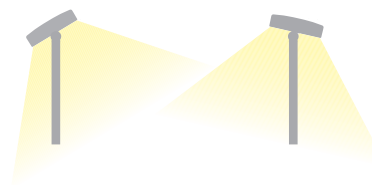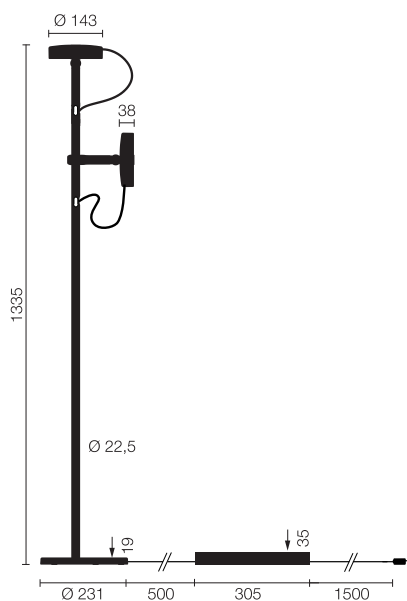

$\eta=97\%$  cd/1000 lm



design  
preis  
SCHWEIZ

Subject to technical modifications and modifications to content. © BELUX AG 10/2014



More information on  
[www.belux.com/u-turn](http://www.belux.com/u-turn)

### BELUX AG

Klünenfeldstrasse 22, Muttenz, CH-4127 Birsfelden  
Tel. +41 61 316 74 01, Fax +41 61 316 75 99  
[www.belux.com](http://www.belux.com), [belux@belux.com](mailto:belux@belux.com)